


# PIO-D96U/PIO-D96SU

Universal PCI, 96-channel Digital I/O Board

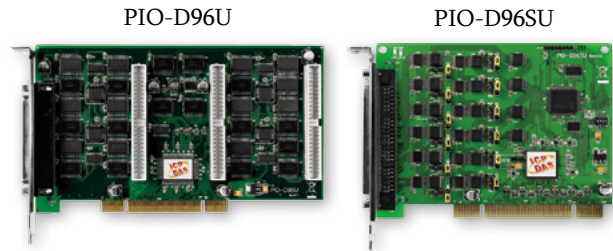

## Features

- Universal PCI (3.3 V/5 V) Interface, Plug & Play
- 96-channel Digital I/O
- Twelve 8-bit Bi-directional Programmable I/O Ports
- All I/O Lines Buffered on the Board
- 4-channel Interrupt Source
- Buffer Output for Higher Driving Capability
- Supports Card ID (SMD Switch)
- Supports DO Status Readback (Register Level)
- DI/O Response Time is about 1  $\mu$ s (1 MHz)

## Introduction

The PIO-D96U/D96SU card is designed as a direct replacement for the PIO-D96, without requiring any modification to the software or the driver.

The PIO-D96U provides four connectors for I/O wiring, while the PIO-D96SU provides a single high-density connector that reduces the amount of installation space required for the card in the computer.

The PIO-D96U/D96SU Universal PCI card supports the 3.3 V/5 V PCI bus, and provides 96 TTL Digital I/O lines that consist of twelve 8-bit bi-directional ports. Each group of three 8-bit ports is arranged on the connector as Port A (PA), Port B (PB) and Port C (PC), respectively, and all ports are configured as inputs on power-up or after a reset.

The PIO-D96U/D96SU card also includes an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.

## Hardware Specifications

Models	PIO-D96U	PIO-D96SU
<b>Programmable DIO</b>		
Channels	96	
<b>Digital Input</b>		
Compatibility	5 V/TTL	5 V/CMOS
Input Voltage	Logic 0: 0.8 V Max. ; Logic 1: 2.0 V Min.	
Response Speed	1 MHz	
<b>Digital Output</b>		
Compatibility	5 V/TTL	5 V/CMOS
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.	Logic 0: 0.1 V Max. Logic 1: 4.4 V Min.
Output Capability	Sink: 6 mA @ 0.33 V Source: 6 mA @ 4.77 V	Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V
Response Speed	1 MHz	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1 50-pin Box Header x 3	Female SCSI II 100-pin x 1
Power Consumption	600 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

## Ordering Information

PIO-D96U CR	Universal PCI, 96-channel Digital I/O Board (RoHS).
PIO-D96SU CR	Universal PCI, 96-channel Digital I/O Board (SCSI II Connector, RoHS)

## Software

### Drivers

- 32/64-bit Windows XP/2003/2008/Vista/7/8
- Linux  DASyLab

### Sample Programs

- DOS Lib and TC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/MATLAB Demo
- VB.NET/C#.NET/VC.NET Demo

## Pin Assignments

### PIO-D96U

Pin Assignment	Terminal No.	Pin Assignment
N.C.	01	20 +5V
N.C.	02	21 GND
PB_7	03	22 PC_7
PB_6	04	23 PC_6
PB_5	05	24 PC_5
PB_4	06	25 PC_4
PB_3	07	26 PC_3
PB_2	08	27 PC_2
PB_1	09	28 PC_1
PB_0	10	29 PC_0
GND	11	30 PA_7
N.C.	12	31 PA_6
GND	13	32 PA_5
N.C.	14	33 PA_4
GND	15	34 PA_3
N.C.	16	35 PA_2
GND	17	36 PA_1
+5 V	18	37 PA_0
GND	19	

Pin Assignment	Terminal No.	Pin Assignment
PC_7	01	02 GND
PC_6	03	04 GND
PC_5	05	06 GND
PC_4	07	08 GND
PC_3	09	10 GND
PC_2	11	12 GND
PC_1	13	14 GND
PC_0	15	16 GND
PB_7	17	18 GND
PB_6	19	20 GND
PB_5	21	22 GND
PB_4	23	24 GND
PB_3	25	26 GND
PB_2	27	28 GND
PB_1	29	30 GND
PB_0	31	32 GND
PA_7	33	34 GND
PA_6	35	36 GND
PA_5	37	38 GND
PA_4	39	40 GND
PA_3	41	42 GND
PA_2	43	44 GND
PA_1	45	46 GND
PA_0	47	48 GND
+5 V	49	50 GND

### PIO-D96SU

Pin Assignment	Terminal No.	Pin Assignment
PA_00	01	51 PA_10
PA_01	02	52 PA_11
PA_02	03	53 PA_12
PA_03	04	54 PA_13
PA_04	05	55 PA_14
PA_05	06	56 PA_15
PA_06	07	57 PA_16
PA_07	08	58 PA_17
PB_00	09	59 PB_10
PB_01	10	60 PB_11
PB_02	11	61 PB_12
PB_03	12	62 PB_13
PB_04	13	63 PB_14
PB_05	14	64 PB_15
PB_06	15	65 PB_16
PB_07	16	66 PB_17
PC_00	17	67 PC_10
PC_01	18	68 PC_11
PC_02	19	69 PC_12
PC_03	20	70 PC_13
PC_04	21	71 PC_14
PC_05	22	72 PC_15
PC_06	23	73 PC_16
PC_07	24	74 PC_17
GND	25	75 GND
PA_20	26	76 PA_30
PA_21	27	77 PA_31
PA_22	28	78 PA_32
PA_23	29	79 PA_33
PA_24	30	80 PA_34
PA_25	31	81 PA_35
PA_26	32	82 PA_36
PA_27	33	83 PA_37
PB_20	34	84 PB_30
PB_21	35	85 PB_31
PB_22	36	86 PB_32
PB_23	37	87 PB_33
PB_24	38	88 PB_34
PB_25	39	89 PB_35
PB_26	40	90 PB_36
PB_27	41	91 PB_37
PC_20	42	92 PC_30
PC_21	43	93 PC_31
PC_22	44	94 PC_32
PC_23	45	95 PC_33
PC_24	46	96 PC_36
PC_25	47	97 PC_37
PC_26	48	98 PC_38
PC_27	49	99 PC_39
+ 5 V	50	100 + 5 V