



Backplane
Systems
Technology

Backplane Systems
Technology Pty Ltd

TEL 02 9457 6400
sales@backplane.com.au
www.backplane.com.au

Top Mounting Keyboards

2212-T/B Series

Compact format, top mounted, vandal resistant keyboard with integrated trackball



- Vandal resistant (20J BS EN 60068-2-75: 1997)
- Weather resistant (IP65)
- Suitable for fixing into work surfaces
- Operational life of more than 4 million cycles per key
- Resistant to most commonly used cleaning agents

- USB 2.0
- Integral 38mm trackball with left & right click keys
- 63 keys
- Compact format: 384mm x 142mm x 40mm

Storm Interface products include technology protected by international patents and design registration. All rights reserved.





The Storm 2212-T/B Series keyboard is configured to allow convenient top mounting installation into a work surface or desktop. Using simple hand tools (jig saw and hand drill) the work surface can be easily prepared to accept this robust, responsive and reliable keyboard.

A stainless steel front plate and captive cast metal or high impact resistant polymer ensure the keyboards resistance to heavy use and harsh environments. An integral water and impact resistant trackball makes this keyboard ideal for kiosk applications.

Overall Dimensions




| Specifications | |
|---|--------|
| Keyboard Weight | |
| with cast metal keytops/steel trackball | 2.50kg |
| with polymer keytops/trackball | 2.10kg |

| Options | |
|-------------|---|
| Build Style | Vandal resistant (stainless steel top plate) |
| Keytops | Chromed cast metal keytops High contrast white polymer keytops |
| Encoder | USB 2.0 |
| Languages | English UK, English USA, French, Spanish, German |
| Cable | Factory Fitted 2.5m USB 2.0 |

| Electrical | |
|---------------------------------|------------------------------------|
| EMC Emissions | EN55022 : 1998 Class B Limit |
| EMC Immunity to ESD | EN55024 : 1998 |
| EMC Immunity to Radiated Fields | EN55024 : 1998 |
| Electrical Safety | EN60950, UL60950 |
| Communication | Industry Standard USB Interface |
| Supply requirements | |
| - voltage | +5V nominal (5.5V to 4.75V) |
| Supply requirements | |
| - current | 60mA (with 2 LEDs illuminated) |

| Environmental | |
|--------------------------------|---------------------------------|
| Sealing – Water / Particulates | EN60529 (sealing to IP65) |
| Trackball sealing | IP65 stationary (IP54 rotating) |
| Temperature | -20°C to +70°C operating (dry) |

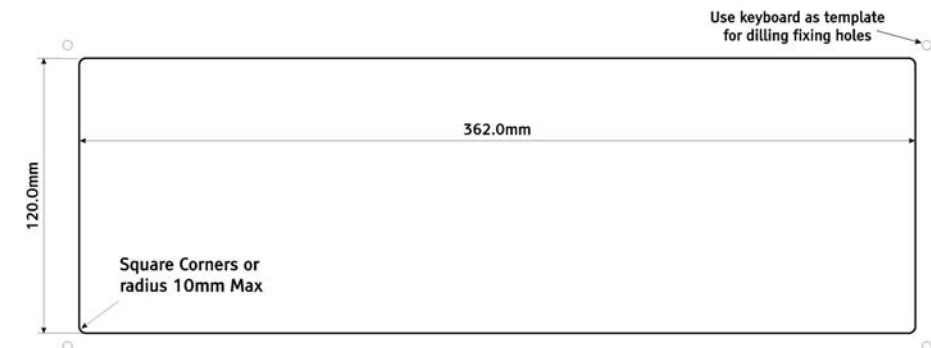

| Mechanical | |
|-------------------|--------------------------------------|
| Impact Resistance | 20 Joules via 50mm dia steel striker |
| Key Pitch | 19mm |
| Travel | 1.5mm nominal |
| Actuation Force | 100g nominal |

| Fixing Components Included | |
|---|--|
| Adhesive Gasket | |
| 4x M5 x 30 A2 stainless steel socket button head screws | |
| 4x M5 stainless steel washers | |
| 4x M5 stainless steel nyloc nuts | |

Storm Interface products are developed primarily for use with current and supported Microsoft Windows® platforms. For use with a non-Windows® platform, please contact Storm Interface for advice. Compatibility with non-Windows® platforms or operating systems cannot be guaranteed.

Storm, Storm Interface, Storm AXS, Storm ATP, Storm Touchless-CX and Storm IXP are trademarks of Keymat Technology Ltd. All rights reserved. This product incorporates proprietary technology and intellectual property retained by Keymat Technology Ltd. (trading as Storm Interface). All rights reserved.

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.



2212-TB-LIT-01 Rev 2 Nov 2021



FM 39602