

# Nuvo-7100VTC Series

Intel® 9th/ 8th-Gen Core™ i7/i5/i3 In-vehicle Controller with 4x or 8x PoE+ Ports, DIO, CAN bus and RAID



## Key Features

- Supports Intel® 9th/8th-Gen Core™ i7/i5/i3 LGA1151 socket-type CPU
- 4x or 8x 802.3at Gigabit PoE+ ports via M12 or RJ45 connectors
- Onboard isolated CAN bus for in-vehicle communication
- 4-CH isolated DI and 4-CH isolated DO
- 2x SATA ports with one hot-swappable HDD tray, supporting RAID 0/ 1
- 2x M.2 B key and 3x full-size mini-PCIe sockets
- 8~35V wide-range DC input with built-in ignition power control
- E-Mark and EN 50155/ EN 45545 certificate


## Introduction

Nuvo-7100VTC is a rugged in-vehicle controller featuring purpose-built set and effortless connectivity. Powered by Intel® 9th/ 8th-Gen Core™ processors with up to 6-core/ 8-core and 64GB DDR4 memory, it provides significant performance increases over previous generations. Nuvo-7100VTC provides flexibility to support a range of peripherals and connections. It has four or eight 802.3at PoE+ ports to supply 25W power to connected devices via M12 or RJ-45 connectors. Screw-lock mechanisms on GbE and USB 3.1 ports guarantee extreme rugged connectivity in shock/ vibration environments. Wireless connectivity is essential for modern day in-vehicle applications and you can simultaneously utilize two M.2 and three mini-PCIe sockets with corresponding 3G/ 4G, WIFI, GPS, and CAN module for this purpose. Additionally, Neosys provides an option of 4G cellular module certified to work with renowned US telecom company to minimize implementation time and cost. On top of all that, Nuvo-7100VTC also features isolated CAN bus, isolated DIO, 8~35V wide-range DC input with ignition power control and is in compliance with E-Mark and EN 50155/ EN45545. The Nuvo-7100VTC is the perfect solution with extraordinary reliability for various in-vehicle applications.


## Specifications

System Core		Expansion Bus	
<b>Processor</b>	Supports Intel® 9th/8th-Gen CPU (LGA1151 socket, 35W TDP) - Intel® Core™ i7-8700T/ i7-9700TE - Intel® Core™ i5-8500T/ i5-9500TE - Intel® Core™ i3-8100T/ i3-9100TE	<b>Mini PCI-E</b>	1x full-size mini PCI Express socket with internal SIM socket (mux with mSATA) 2x full-size mini-PCIe sockets (USB signals only) with internal SIM sockets
<b>Chipset</b>	Intel® Q370 platform controller hub	<b>M.2</b>	2x M.2 2242 B key socket, one with dual front-accessible SIM sockets, supporting dual SIM mode with selected M.2 LTE module
<b>Graphics</b>	Integrated Intel® HD Graphics 630	<b>Power Supply</b>	
<b>Memory</b>	Up to 64 GB DDR4 2666/ 2400 SDRAM (two SODIMM slots)	<b>DC Input</b>	1x 3-pin pluggable terminal block for 8~35V DC input (IGN/ GND/ V+)
<b>AMT</b>	Supports AMT 12.0	<b>Remote Ctrl. &amp; Status Output</b>	1x 3-pin pluggable terminal block for remote control and PWR LED output
<b>TPM</b>	Supports TPM 2.0	<b>Mechanical</b>	
<b>I/O Interface</b>		<b>Dimension</b>	240 mm (W) x 225 mm (D) x 84 mm (H)
<b>Ethernet</b>	2x Gigabit Ethernet ports by Intel® I219 and I210	<b>Weight</b>	3.5 kg
<b>PoE+</b>	4x IEEE 802.3at (25.5W) Gigabit PoE+ ports by Intel® I210 - M12 x-coded connector (Nuvo-7100VTC); - RJ45 connector (Nuvo-7104VTC) 8x IEEE 802.3at (25.5W) Gigabit PoE+ ports by Intel® I210 - RJ45 connector (Nuvo-7108VTC)	<b>Mounting</b>	Wall-mount with damping brackets (Standard) or DIN-rail mount (optional)
<b>CAN</b>	1x isolated CAN 2.0 port	<b>Environmental</b>	
<b>Isolated DIO</b>	4x isolated DI and 4x isolated DO	<b>Operating Temperature</b>	-40°C ~ 70°C **
<b>USB 3.1</b>	4x USB 3.1 Gen2 (10 Gbps) ports 4x USB 3.1 Gen1 (5 Gbps) ports	<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Video Port</b>	1x VGA, supporting 1920 x 1200 resolution 1x DVI-D, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution	<b>Humidity</b>	10%~90% , non-condensing
<b>Serial Port</b>	2x software-programmable RS-232/422/485 ports (COM1/ COM2) 2x RS-232 ports (COM3/ COM4)	<b>Vibration</b>	IEC61373:2010, Category 1, Class B Body mounted (part of EN50155)
<b>Audio</b>	1x Mic-in and 1x speaker-out	<b>Shock</b>	IEC61373:2010, Category 1, Class B Body mounted (part of EN50155)
<b>Storage Interface</b>		<b>EMC</b>	EN 50155, EN45545 E-Mark (Nuvo-7108VTC) CE/FCC Class A, according to EN 55022 & EN 55024
<b>SATA HDD</b>	1x hot-swappable HDD tray for 2.5" HDD/ SSD installation 1x Internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	* For i7-9700E and i7-8700 running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature. ** For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.	
<b>mSATA</b>	1x full-size mSATA port (mux with mini-PCIe)		
<b>M.2</b>	1x M.2 2280 M key socket (PCIe Gen3 x4) for NVMe SSD or Intel® Optane™ memory installation		

## Appearance

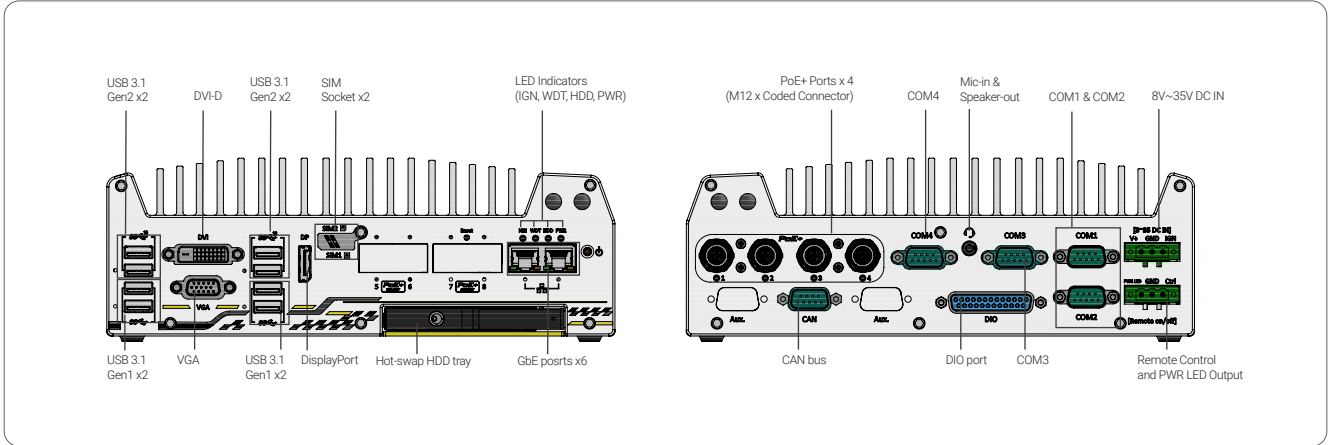

## Dimensions

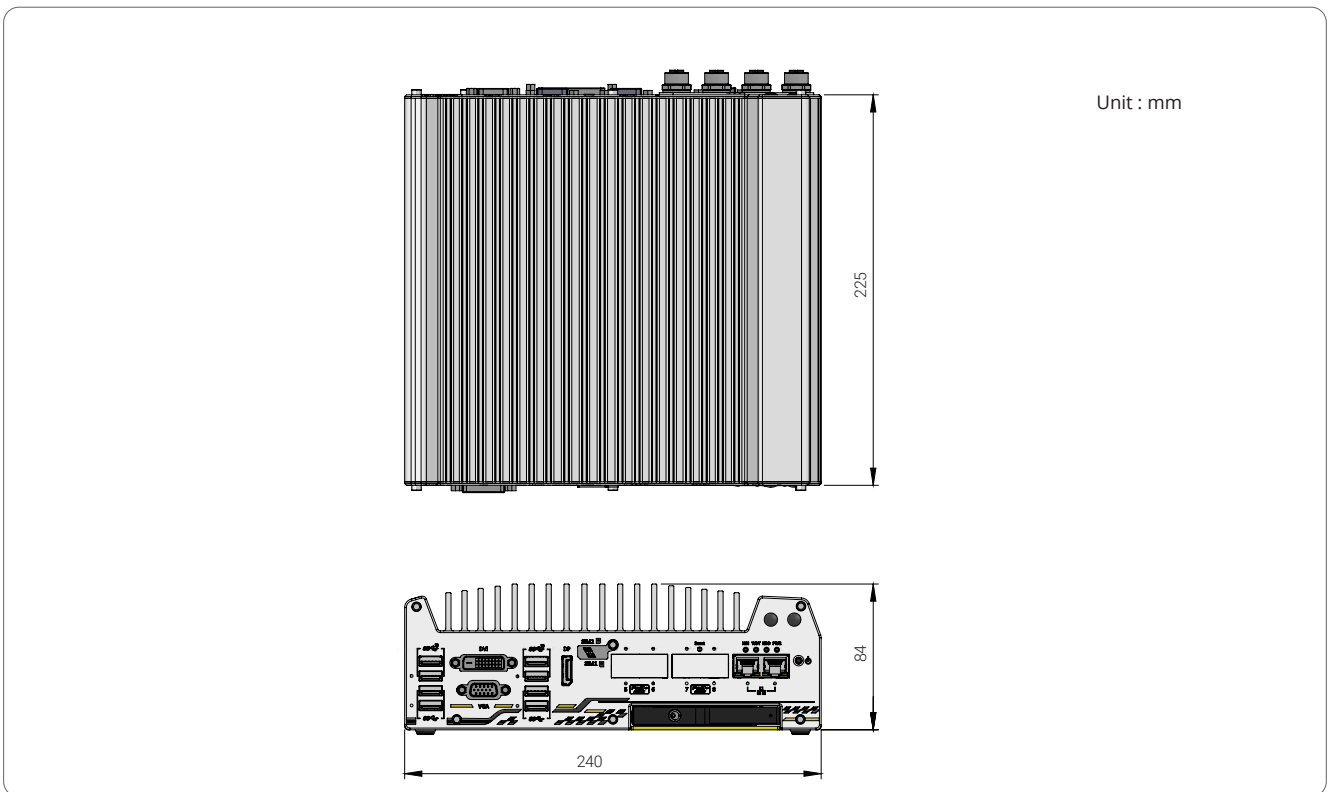

## Ordering Information

Model No.	Product Description
Nuvo-7100VTC	Intel® 9th/ 8th-Gen Core™ in-vehicle controller with 4x M12 PoE+ Ports, DIO, CAN bus and RAID
Nuvo-7104VTC	Intel® 9th/ 8th-Gen Core™ in-vehicle controller with 4x RJ45 PoE+ Ports, DIO, CAN bus and RAID
Nuvo-7108VTC	Intel® 9th/ 8th-Gen Core™ in-vehicle controller with 8x RJ45 PoE+ Ports, DIO, CAN bus and RAID

## Optional Accessories

Cbl-M12X8M-RJ45-500CM	M12 (8-pole-X-coded) to RJ45, CAT6, length : 500CM
Cbl-M12X8M-RJ45-1000CM	M12 (8-pole-X-coded) to RJ45, CAT6, length : 1000CM
PA-120W-OW	120W AC/DC power adapter 20V/6A; 18AWG/120cm; cord end terminals for terminal block, operating temperature : -30 to 70 °C.

## Optional Cellular Module

NSIO-LTE-7455	Cat. 6 LTE embedded socket modem
---------------	----------------------------------