



1U DC Input ATX Type

ACE-717CX

1U 24V DC Input ATX Power Supply




+5Vsb & PS On cable



Specifications

Input Type	19 ~ -32 VDC					
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
	6 A	8 A (1 A min.)	8 A (1 A min.)		0.5 A	1 A
Efficiency	75%					
Temperature	Operating: 0°C ~ 70°C (can be started up at -20°C) Storage: -40°C ~ 75°C					
MTBF (hrs)	100,000					
Output Connector	5VSB & PS_ON cable					
Dimensions (mm)	198 x 97 x 39					

Dimensions (Unit: mm)

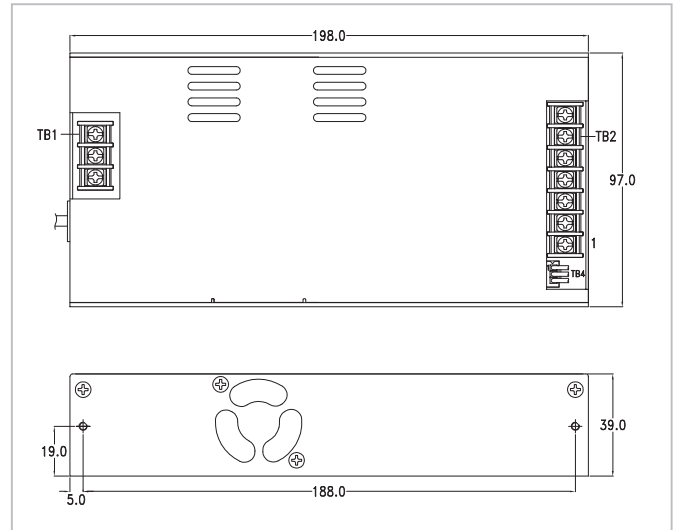

Ordering Information

Part No.	Description
ACE-717CX-RS	170W 24V DC input ATX Power Supply

ACE-716C


150 W 24V DC Input AT Power Supply



Specifications

Input Type	19 ~ 30 VDC				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
	18 A (2 A min.)	4 A	0.5 A	1 A	
Efficiency	70%				
Temperature	Operating: -20°C ~ 70°C (50°C ~ 70°C derating curve) Storage: -20°C ~ 85°C				
MTBF (hrs)	210,000				
Output Connector	Optional cable				
Dimensions (mm)	198 x 97 x 40.5				

Dimensions (Unit: mm)

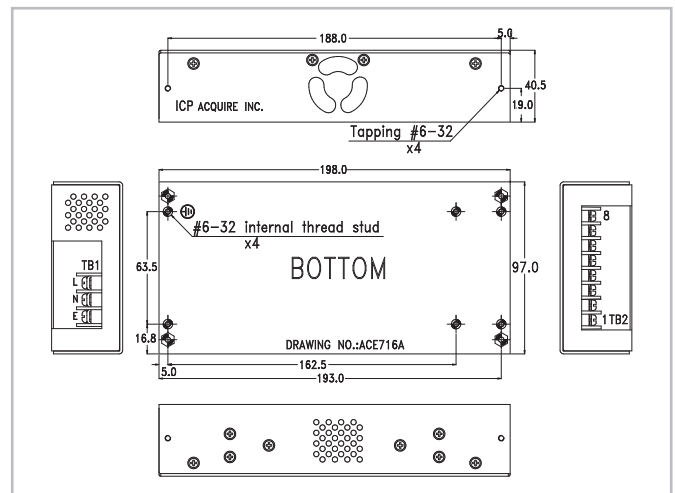

Output terminal block connectors

Pin 1, 2	Pin 3, 4	Pin 5	Pin 6	Pin 7	Pin 8
5 V	GND	-5 V	-12 V	GND	+12 V

Ordering Information

Part No.	Description
ACE-716C-RS	150 W 24 V DC Input AT Power Supply