

Product Features

- 32" Display with UHD 4K (3840 x 2160) native resolution
- Dimmable 0-100% with backlight light sensing
- Thin and Compact Design with impact resistant screen
- Panel Mount design with front side removable handle
- AR protection Glass or Projected Capacitive Touch Screen
- Fanless and Ventless design, Easy to clean



Option 1
With AR Protection Glass, No Touch function



Option 2
With Projected Capacitive Multi Touch

Product Specifications

TFT Technology	LED Backlight Technology, TFT Active-matrix, Widescreen, IPS Technology
Viewable Size	32" diagonal
Active Area	708.48"(H) x 398.52"(V) mm
Native Resolution	3840 x 2160 (UHD 4K)
Pixel Pitch	0.181 (H) x 0.181(V)mm
Aspect Ratio	16:9
Response Time	12ms (Gray to Gray)
Light Intensity	350 cd/m2 (typ), Optional for high brightness 700cd/m2 (typ)
Contrast Ratio	1000:1 (typ)
View Angle	89/89/89/89
Max Colors	1.07B
Synchronization Signal Auto-detect	Digital Separate Sync., Composite Sync., Sync. On Green
Synchronization Range	31.5 kHz to 60.0 kHz (H) - 30 Hz to 75 Hz (V)
Optimal Resolution and Hz	3840 x 2160 @ 60 Hz 4:4:4
Detectable Resolutions (Partial List)	640 x 480, 720 x 400, 800 x 600, 1024 x 768, 1280 x 1024, 1600 x 1200, 1920 x 1080, 1920 x 1200, 2560 x 1440, 3840 x 2160, 4096 x 2160
Power Specifications	AC 110~240V (Default) DC 24V (Optional) MIL-DTL-38999/1 Connector Power Consumption 60W typical, normal operation
User Controls and Activity	Option 1 : Power, Brightness Down/Up, Auto Adjustment, Main Menu, Day/Night Mode, Key Pad Control Option 2 : Power ON/OFF, Menu Brightness Control

Input Signal	
Product Dimensions	
Cutout Dimension	
Mounting	
Product Weight	
Touch	
Operating Temperature	
Storage Temperature	
Order Information	
Certificates	
Compliance	



Backplane
Systems
Technology

Backplane Systems
Technology Pty Ltd

TEL 02 9457 6400
sales@backplane.com.au
www.backplane.com.au

Proudly Australian-Owned Since 1989


Military Grade EMC Compliance

EMC (MIL-STD 461E/F Compliance)			
EMC Test Spec	Type of Test	Frequency Range	Requirement
CE101	Conducted Emissions	30Hz ~10kHz	30Hz ~ 1kHz :110 dB 1k-10k:110-90 dB
CE102	Conducted Emissions	30Hz ~10kHz	10kHz ~ 500kHz: 100-66dB, 500kHz~10MHz:66dB
RE101	Radiated Emissions	30Hz ~100kHz	(30~100k :180-110 dBpT)
RE102	Radiated Emissions	10kHz ~18GHz	(2MHz~18G Hz: 44-89 dB)

Military Grade Environmental Compliance

Environmentals (MIL-STD 810F/G Compliance)		
Low Pressure	Operating	15,000 ft, Method 500.5 / Procedure II
	Storage	15,000 ft, Method 500.5 / Procedure I
Salt Fog	Method 509.5	
Vibration	5 ~ 500 Hz, 1.48 & 1.90 & 2.24 Grms Method 514.6 / Procedure I	
Transit Drop	Method 516.6 / Procedure IV	
Shock	Method 516.6 / Procedure I	

Mechanical Drawing

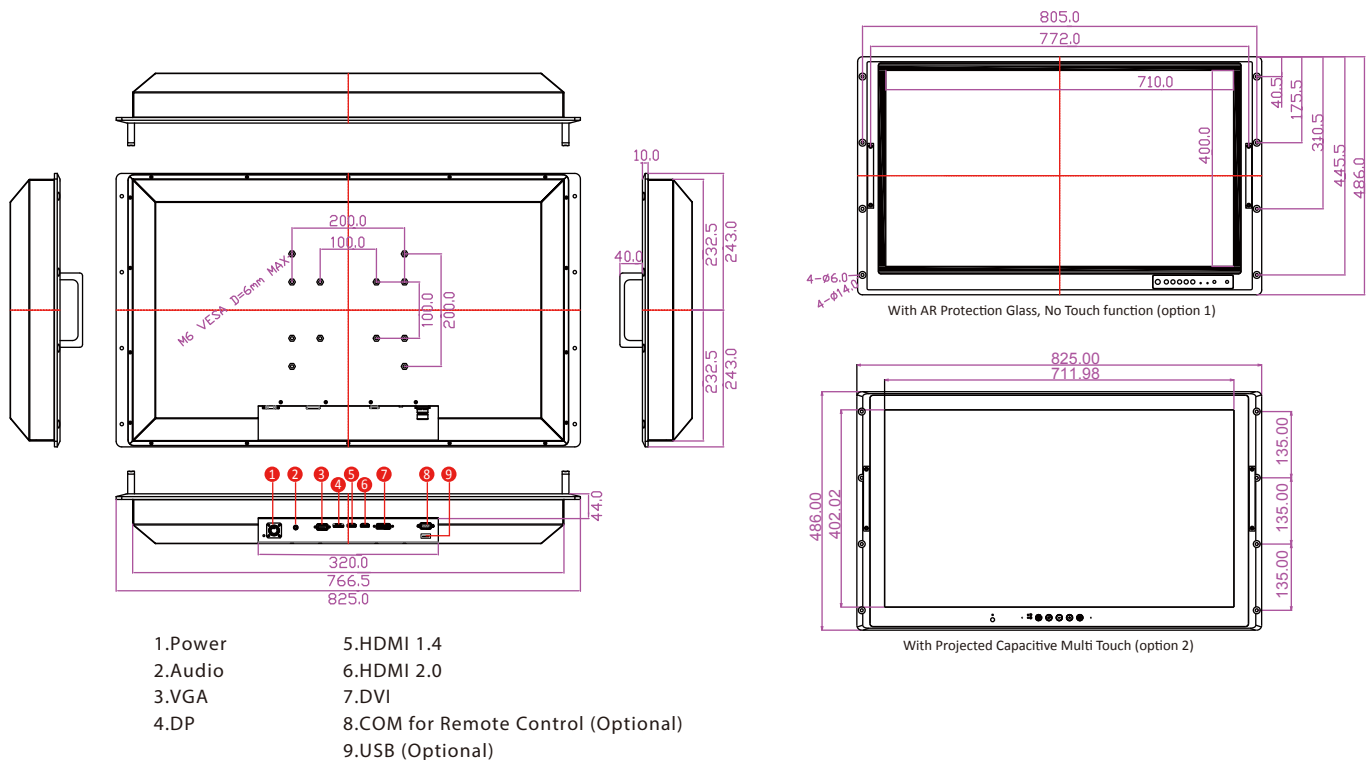

Backplane Systems Technology

Backplane Systems Technology Pty Ltd
 TEL 02 9457 6400
 sales@backplane.com.au
 www.backplane.com.au

Proudly Australian-Owned Since 1989

