



# 23.8" GC65 Display (Standard I/O) - W24L100-GCA2

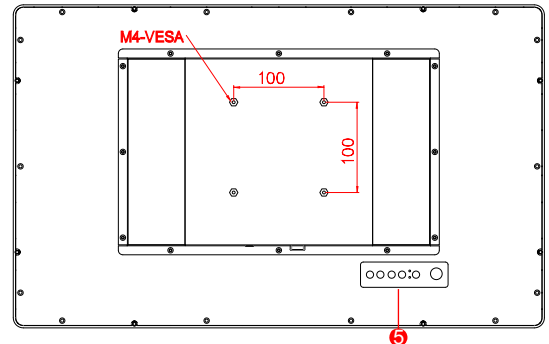

## Features

- 23.8" 1920 x 1080 Resolution
- VGA input and HDMI input
- Projected Capacitive Multi-Touch
- Front IP65 for protection against water and dust

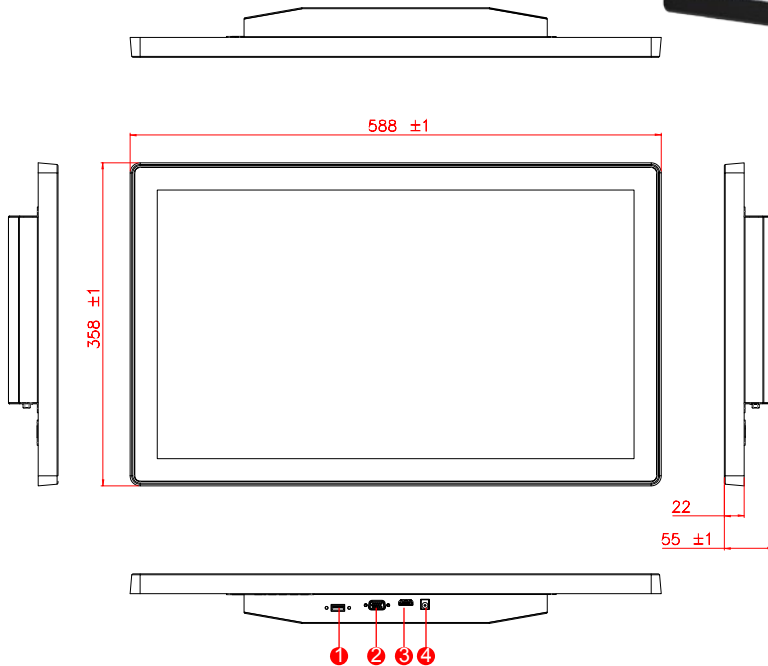

1. USB for Touch
2. VGA
3. HDMI
4. 12V DC in
5. OSD

## Specifications

### Display Spec :

- Size/Type : 23.8" TFT
- Resolutions : 1920x1080
- Brightness : 250cd/m<sup>2</sup> (typ.)
- Contrast Ratio : 3000 : 1 (typ.)
- Viewing Angle : -89~89(H);-89~89(V)
- Max Colors : 16.7M
- Touch : Projective Capacitive Touch

### Power Specification :

- Power Input : 12V DC 2.5mm, with External AC to DC Adapter, comply with Level V1 efficiency standard
- Power Consumption : 25W typical, normal operation

### Environment Considerations :

- Operating Temperature : 0 °C to 50 °C
- Operating Humidity : 10% to 90% (non-condensing)
- IP Rating : Front IP65

### Input Specifications :

- Input Ports : 1 x VGA  
1 x HDMI (Optional)
- OSD Membrane : 5 keys (+, -, power, Esc, Enter)

### Mechanical Specification :

- Mounting : VESA Mount (100 x 100 mm); Panel Mount
- Dimensions (W x H x D) : 588 x 358 x 55 (mm)

### Product Accessory :

- Accessory : 12V DC in Adapter  
HDMI cable (Optional)  
VGA cable  
USB cable for touch