sales@backplane.com.au www.backplane.com.au

FM12Q



12.1inch Android Car-mounted Computer with Qualcomm Snapdragon™ 660



KEY FEATURES

- Qualcomm Snapdragon[™] 660 octacore, 2.2 GHz CPU
- 12.1" 1024 x 768 Panel with PCAP Touch, Android car mounted computer
- Field replaceable front panel to reduce service costs
- IP65 waterproof and dustproof vehicle mounted computer
- Wide range -30°C to 50°C operating temperature








SPECIFICATIONS

Display			
Туре	Projected Capacitive Multi Touch	Touch Mode	Support Hand, Stylus, Glove Mode
Resolution	1024x768	Size	12.1 inches
Contrast Ratio	1000:1	Panel Brightness	400 nits 800 nits(Optional)
View Angles	89,89,89,89		
System Specificat	ion		
Processor	Qualcomm® Snapdragon™ 660 (Octa-Core 2.2 GHz)	Memory	3GB
Storage	32GB	Operating System	Android 9.0
WLAN	Support	ВТ	Support
WWAN	4G/LTE (Optional)	GNSS	GPS/GLONASS
Sensors	G-Sensor, Temp. Sensor		
Camera			
Front Camera	2MP Camera		
Mechanical			
Dimension	Tablet: 307 x 225 x 41 mm Docking: 202 x 245 x 52 mm	Weight	Tablet 1.7 kg Docking 1.6 kg
Mounting	RAM Mount/ VESA Mount	Cooling System	Fanless Design
Docking Housing	Aluminum Alloy Housing		
IO Ports			
USB Port	1 x USB 3.0 Type C (OTG)(Tablet) 1 x DB9 Connector for 2 x USB 2.0 Port(Docking)	Serial Port	2 x COM Port(Docking)
SD Card Slot	1 x Micro SD Card Slot(Tablet)	SIM Card Slot	1 x Dual-Nano SIM Card Slot(Tablet)
Audio	2 x Speaker(Docking) 1 x CANBus or 1 x Audio(Docking)	LAN	1 x Gigabit LAN port(Docking)
Indicator	3 x LED Indicator (WLAN, UPS battery, Heater)		
Environment			
Operating Humidity	5% to 95% RH, Non-Condensing	Operating Temperature	-30°C to 50°C
Storage	-30°C to 60°C	Shock	MIL-STD-810H Method 516.8 Procedure I

Temperature IP65 **Vibration** MIL-STD-810H Method 514.8 Procedure I IP rating Support EN62262 IK07 Rating **ESD Impact** Compliant with EN 61000-4-2, Enhanced ESD to ±8kV Direct & ±15kV Air Certification Certification CE, FCC Control **Button** 1 x Power Button, 5 x Function Button (Programmable Function Key Configured by **Power** 7.6V UPS Battery (2S1P) **Battery Power Rating** Docking: 10V-60V with ignition control Minimum 30 minutes Tablet: 12V DC In **Security Function SOTI MobiControl** SOTI MobiControl Compliance **Accessory** Optional Accessory 1.8M RS232 Cable 5M Power Cable with Fuse Kit Accessory 0.3M USB Cable 0.3M Audio Cable 0.15M Power Converter Cable 1.8M CAN BUS Cable DC Jack Power Cable 1.8M CAN BUS Open Wire Cable 2M IP65 LAN Cable 84W Adapter with power cable GPS & LTE 2M Combo Antenna(VM240) Cable Clamp Kit Wi-Fi Antenna x 2 GPS & LTE 5M Combo Antenna (VM9C) **Quick Start Guide** Magnetic Combo Antenna (VM10S) External Antenna Fixing Bracket WWN Antenna Dock + Latch Locking Key **HDMI** Adapter Stylus Kit + Screw

DIMENSIONS UNIT:MM

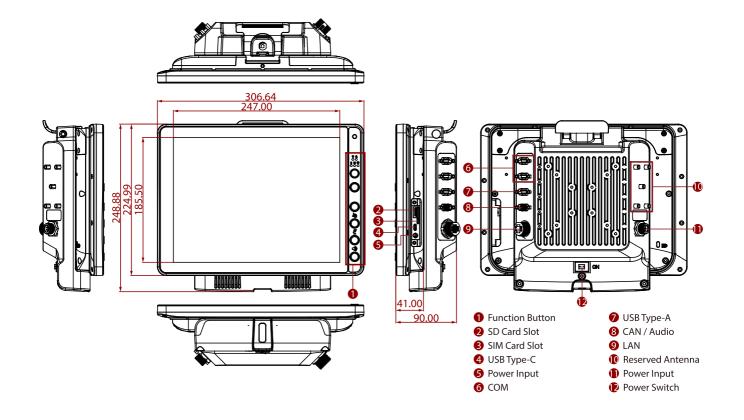



Backplane Systems Technology Pty Ltd

NOTE

- 1. Total usable memory will be less dependent upon actual system configuration.
- 2. SOTI is available upon request.
- 3. Length measurements do not include protrusions. Weight varies with options.
- 4. Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.
- 5. Accessories may vary depending on your configuration.
- 6. This is a simplified drawing and some components are not marked in detail.
- 7. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

