

SBOX-2321

Intel Atom® x6416RE w / 2x LAN / 1x DP / 1x DVI-D / 2x COM / DC-IN 9-36V Embedded Computer



- Intel Atom® x6416RE Quad-core Processor
- Dual Display Output (1 x DP / 1 x DVI-D)
- 2 x 2.5GbE for Embedded IoT Connection
- 3 x M.2 & 1 x mPCIe Slots for Wi-Fi / WWAN / CAN Expansion
- Wide Operating Temperature -40 ~ 70°C for Harsh Environment
- Dual SIM for Network Redundancy
- Industrial Fanless Design

EVSE HMI Applications



1 x DVI for Infotainment Display

For advertisements or information displayed on the EVSE.



1 x DP for EVSE HMI Touch Display

To display charging status and payment information



2 x M.2 + 1 x mPCIe for WWAN or WLAN

3 x expansion slots for various wireless or LTE modules to provide EV owners with a variety of services or CPO server communication.



2 x 2.5GbE for EVSE Control System

To connect to the PLC control system. Standard Industrial Ethernet controller that complies with OCPP protocol connection.

Support EVSE Controller Communication



Power
Module

ISO 15118

Overvoltage/current
Protection

Specifications

System

Module

- Intel Atom® x6416RE Quad-core Processor

Graphics

- Intel® UHD Graphics

Memory

- 1 x DDR4-3200 SO-DIMM up to 32 GB

Security

- Infineon® TPM 2.0

Watchdog

- 1 ~ 255 Level Reset Setting

Interface

Ethernet

- 2 x Intel® 2.5GbE Support TSN H/W Architecture

USB

- 2 x USB 3.2 10 Gbps
- 2 x USB 2.0

Video

- 1 x DP 1.4 / 1 x DVI-D (*Single-link cable only)

Audio

- 2 x 3.5mm TRS Jack for stereo MIC-in and Line-out

Serial Port

- 2 x RS-232/422/485 (the 3rd for optional)

GPIO

- 1 x DB-9 for 4 x DI / 4 x DO (12VDC / 100mA)

SIM Card

- 2 x SIM card slots

Antenna

- 4 x Pre-cutting SMA antenna holes

Internal Expansion

M.2

- 1 x M.2 2230 Key E slot
- 1 x M.2 3042/52 Key B slot

mPCIe

- 1 x mPCIe slot

Storage

Type

- 1 x SATA 6Gb/s for 2.5" SATA storage
- 1 x M.2 2280 Key M slot for NVMe/SATA SSD

Software

Operating System Support

- Windows 10 IoT LTSC 64-bit
- Windows 11 IoT 64-bit
- Ubuntu 22.04 LTS 64-bit

Environmental

Operating Temp.

- -40 ~ 70°C w/ 0.6m/s airflow

Storage Temp.

- -40 ~ 85°C

Relative Humidity

- 10% RH ~ 90% RH (non-condensing)

Certification / Standard

- CE, FCC Part-15 Class A

Power

Power Input

- 9 ~ 36VDC Terminal Block w/ OCP and OVP protection

Mechanical

Construction

- Aluminum Alloy

Thermal Design

- Fanless Passive Cooling Design

Mounting Method

- Wall-mounting

Weight

- 1.48kg


Dimensions

- 182 (L) x 171 (W) x 54 (H) mm (w/o Mounting bracket)

Packaging

- 98% of Sustainable/Recyclable Packaging

Dimensions

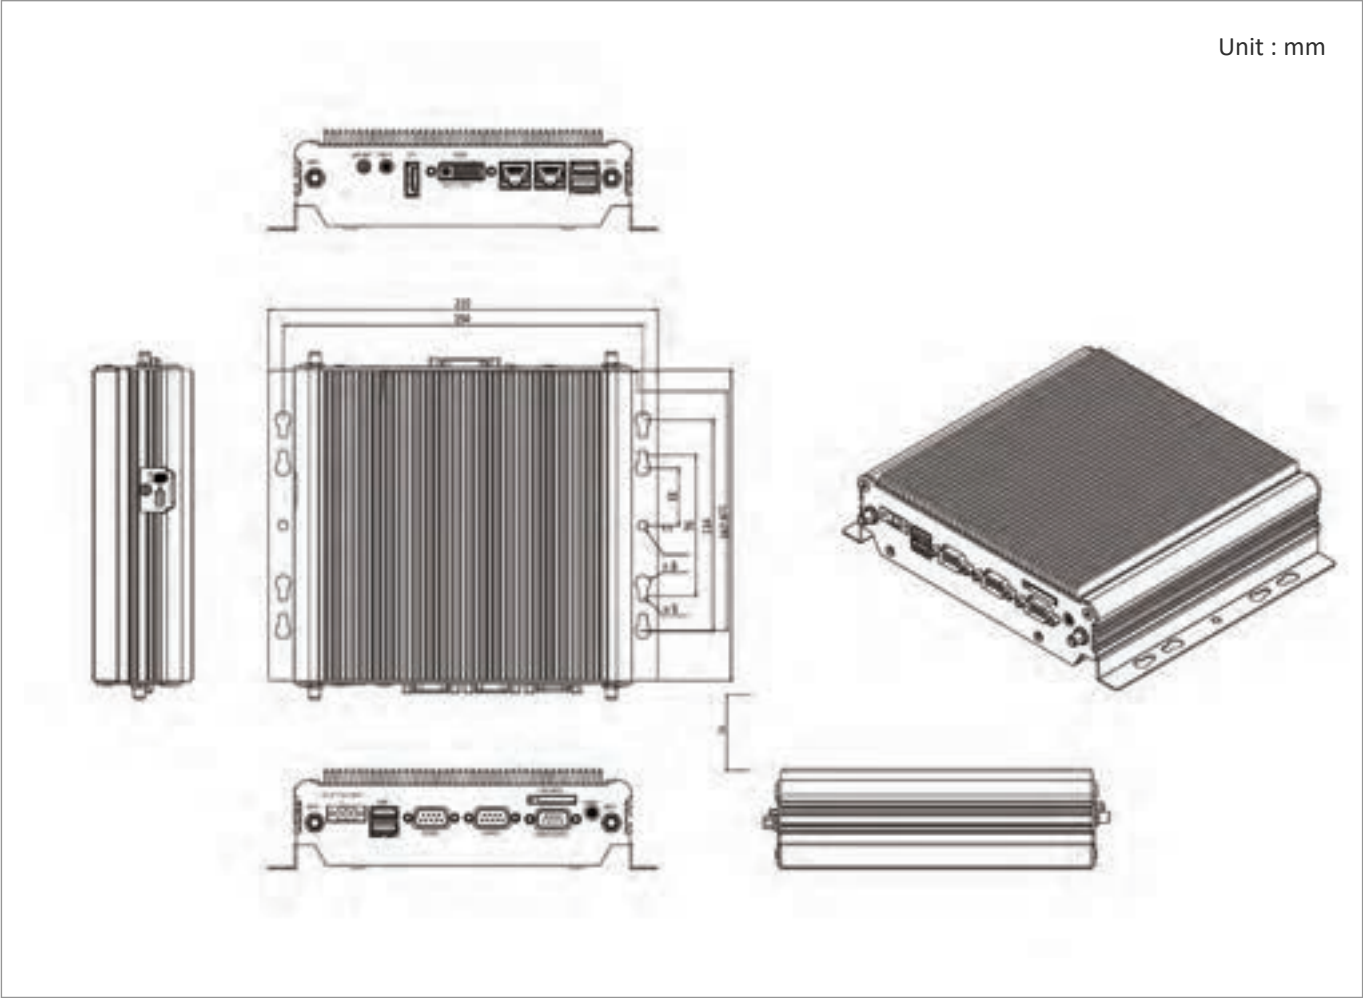

Ordering Information

Model Number	SBOX-2321-zz; zz=A4=Atom x6416RE, zz=A2=Atom x6214RE
Description	Intel Atom® x6416RE w/ 2x LAN/ 1x DP/ 1x DVI-D/ 2x COM/ DC-IN 9-36V Embedded Computer
State of Origin	Made in Taiwan

Optional Accessories

Memory	DDR4 SO-DIMM 3200, 8GB~32GB (-40°~85°C)
SSD	M.2 2280 Key B+M SATA SSD TLC 64GB~1TB (-40°~85°C)
NVMe SSD	M.2 2280 Key M NVMe TLC 256GB~1TB (-40°~85°C)
Wi-Fi / Bluetooth	M.2 2230 Key A+E Module
CAN Bus	mPCIe CAN Bus Module
5G / LTE	M.2 3042/3052 Key B Module

All specifications are subject to change without notice.