

VCM

1000

Intel® Core™ i9/i7/i5/i3 Processor (14th Gen)
Compact Embedded Computing System



Backplane
Systems
Technology

Backplane Systems
Technology Pty Ltd

TEL 02 9457 6400
sales@backplane.com.au
www.backplane.com.au

Proudly Australian-Owned Since 1989



▲ Digital Factory



- 24-core Intel® Core™ i9/i7/i5/i3 Processor (14th gen, codename : RPL-S Refresh/RPL-S/ADL-S) running with Intel® H610E PCH
- 2 DDR5 5200MHz SO-DIMM, up to 96GB Memory
- 6 Independent GigE LAN with 4 IEEE 802.3at PoE+
- 12 USB, 2 COM RS-232/422/485, 28 Isolated DIO
- WiFi/4G/3G/LTE/GPRS/UMTS, M.2 Key E, M.2 Key B
- Software Ignition Control, TPM 2.0, Intel® TCC
- Compact 2U half-rack design, -25°C to 75°C wide range operating temperature
- Optional VHub AIoT Solution Service supports OpenVINO based AI accelerator and advanced Edge AI applications

▼ Mobile Robots



▲ Public Security

intel
partner
Gold
IoT Solutions

OpenVINO™



VHub

Specifications

System

Processor	- 24-core Intel® Core™ i9/i7/i5/i3 Processor (14th gen, Raptor Lake-S Refresh) - 24-core 13th Gen Intel® Core™ i9/i7/i5/i3 Processor (Raptor Lake-S) - 16-core 12th Gen Intel® Core™ i9/i7/i5/i3 Processor (Alder Lake-S)
Chipset	Intel® H610E
BIOS	AMI
SIO	IT8786E
Memory	2 DDR5 5200MHz SO-DIMM, up to 96GB (Non-ECC)
OS	Window 11, Windows 10, Linux

I/O Interface

Serial	2 COM RS-232/422/485
USB	VCM-1000 : 4 USB 3.2 (External), 4 USB 2.0 (External), 2 USB 2.0 (Internal) VCM-1100 : 8 USB 3.2 (External), 4 USB 2.0 (External), 2 USB 2.0 (Internal)
Isolated DIO	VCM-1000 : NA VCM-1100 : 28 Isolated DIO : 24 DO, 4 DI
LED	Power, HDD, PoE, Wireless
SIM Card	1 SIM Card Socket (Internal)

Expansion

M.2	- 1 M.2 Key B Socket (2280/3052/3042, PCIe, SATA, USB 2) - 1 M.2 Key E Socket (2230, PCIe)
-----	---

Graphics

Graphics Processor	Intel® UHD Graphics 770 driven by Intel® X® Architecture
Interface	- 1 VGA : Up to 1920 x 1200 @60Hz - 1 DVI-D : Up to 1920 x 1200 @60Hz

Storage

SATA	VCM-1000 : 1 SATA III (6Gbps) VCM-1100 : 2 SATA III (6Gbps)
M.2	1 M.2 Key M Socket (2280/22110, PCIe x2, SATA)
Storage Device	VCM-1000 : 1 2.5" SSD/HDD Bracket (Internal) VCM-1100 : 2 2.5" SSD/HDD Bracket (Internal)

Ethernet

LAN 1	Intel® I219LM GigE LAN
LAN 2	Intel® I210 GigE LAN

PoE (VCM-1100)

LAN 3 to LAN 6	GigE IEEE 802.3at (25.5W/48V) PoE+ by Intel® I350
----------------	---

Power

Power Input	24V DC Power Input
Power Interface	3-pin Terminal Block : V+, V-, GND
Ignition Control	16-mode Software Ignition Control
Remote Switch	3-pin Terminal Block

Others

TPM	Infineon SLB9670 supports TPM 2.0, SPI Interface
Watchdog Timer	Reset : 1 to 255 sec./min. per step
Smart Mgmt.	Wake on LAN, PXE supported
HW Monitor	Monitoring temperature, voltages. Auto throttling control when CPU overheats.

Mechanical

Dimensions	VCM-1000 : 200 x 200 x 55 (mm) VCM-1100 : 200 x 200 x 67 (mm)
Weight	VCM-1000 : 2.5kg (5.51 lb) VCM-1100 : 2.8kg (6.18 lb)
Mounting	- Wallmount by mounting bracket - VESA Mount (Optional) - DIN Rail Mounting (Optional)

Environment

Operating Temp. (with air flow)	35W CPU Fanless : -25°C to 60°C (-13°F to 140°F) 65W CPU Fanless : -25°C to 45°C (-13°F to 113°F) 35W CPU w/Fan : -25°C to 75°C (-13°F to 167°F) 65W CPU w/Fan : -25°C to 60°C (-13°F to 140°F)
Storage Temp.	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @75°C
Shock	VCM-1000 : MIL-STD-810G, 516.7 Procedure I VCM-1000F/1100F : IEC 61373 : 2010 (Railway Applications)
Vibration	VCM-1000 : MIL-STD-810G, 514.7 Procedure I 516.7 Procedure I VCM-1000F/1100F : EC 61373 : 2010 (Railway Applications)
EMC	CE, FCC

Order Information

Model	LAN		USB 3.2	SSD	COM	Isolate DIO	FAN
	GigE	PoE+					
VCM-1000	2	-	4	1	2	-	Fanless
VCM-1000F	2	-	4	1	2	-	Fan
VCM-1100F	6	4	8	2	2	28	Fan

CPU List

Series	CPU	Cores	GHz	TDP (W)	CPU	Cores	GHz	TDP (W)	ECC
Intel® Core™ (14th Gen)*	i9-14900	24	5.8	65	i9-14900T	24	5.5	35	N
	i7-14700	20	5.4		i7-14700T	20	5.2		
	i5-14500	14	5		i5-14500T	14	4.8		
	i3-14100	4	4.7		i3-14100T	4	4.4		
Intel® Core™ (13th Gen)	i9-13900E	24	5.2	65	i9-13900TE	24	5	35	N
	i7-13700E	16	5.1		i7-13700TE	16	4.8		
	i5-13500E	14	4.6		i5-13500TE	14	4.5		
	i3-13100E	4	4.4		i3-13100TE	4	4.1		
Intel® Core™ (12th Gen)	i9-12900E	16	5	65	i9-12900TE	16	4.8	35	N
	i7-12700E	12	4.8		i7-12700TE	12	4.7		
	i5-12500E	6	4.5		i5-12500TE	6	4.3		
	i3-12100E	4	4.2		i3-12100TE	4	4		

* 14th Gen support PC Client use condition only.

Optional Software

VHub AI Developer	AI Developer Kit
VHub ROS	AMR Developer Kit
VHub EtherCAT	I/O Control Platform


Accessories

DDR5 48G	Certified DDR5 48GB 5600MHz RAM
DDR5 32G	Certified DDR5 32GB 4800/5600MHz RAM
DDR5 24G	Certified DDR5 24GB 5600MHz RAM
DDR5 16G	Certified DDR5 16GB 4800/5600MHz RAM
DDR5 8G	Certified DDR5 8GB 4800/5600MHz RAM
PWA-120W1	120W, 24V, AC 90V-264V Power Adapter with 3-pin Terminal Block
PWA-160W-WT	160W, 24V, AC 85V-264V Power Adaptor with 3-pin Terminal Block, Wide Temperature
PWA-180W	180W, 24V, AC 90V-264V Power Adapter with 3-pin Terminal Block
PWA-280W	280W, 24V, AC 85V-264V Power Adaptor with 3-pin Terminal Block, Wide Temperature -30C to +70C *Recommended when enable turbo mode (35W CPU)
PWA-330W	330W, 24V, AC 90V-264V Power Adapter with 3-pin Terminal Block *Recommended when enable turbo mode (65W CPU)
VESA Mount	VESA Mounting Kit
DIN-RAIL Kit	DIN Rail and VESA Mounting Kit
M.2 Storage Module	M.2 Key M Storage Module
4G Module	4G/GPS Module with Antenna
WiFi & Bluetooth	WiFi & Bluetooth Module with Antenna


Dimensions & Drawing

Unit : mm (inch)

VCM-1000

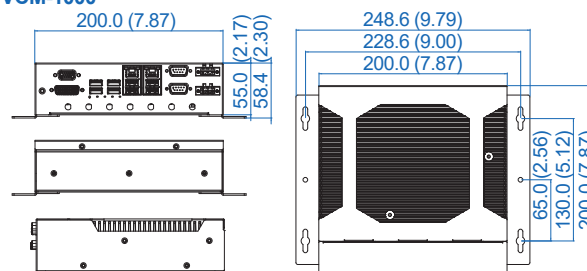

VCM-1000F

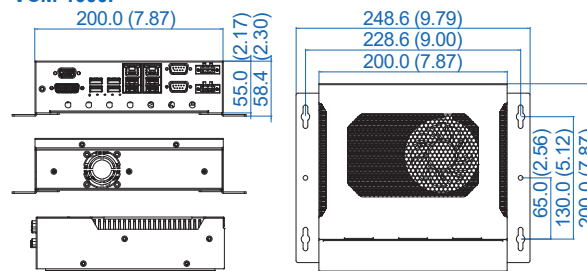

VCM-1100F

